

R. C. Tronics Incorporated

SPECIALIZING IN ELECTRONIC CONTROLS


Econo

Bus Power Center

RCT-01437-00000

All connections are "Plug-N-Play" for easy removal or replacement.
 System enabled with OEM ignition input. ie exception Electric Door Operator.
 Switch center mounts conveniently in any console.
 Electric door operator with external limits. (Switch 1 on RCT-01026).
 Dome light relay, output 30 ampere, (Switch 2 on RCT-01026)
 Side light relay, output 30 ampere. (Switch 3 on RCT-01026).
 Aux. #1 relay, output 30 ampere, (Switch 4 on RCT-01026).
 Aux. #2 relay, output 30 ampere, (Switch 5 on RCT-01026).
 Lift switch, to negative, (Switch 1 on RCT-01027, optional switch center).
 Idler switch, to negative, (Switch 2 on RCT-01027, optional switch center).
 Indirect light relay output 30 ampere, (Switch 3 on RCT-01027, optional switch center).
 All fuses or optional circuit breakers are 30 ampere field replaceable.
 Visual LED indicators for making trouble shooting a visual event.
 Red LED, "Open Fuse", Amber LED Relay "On", Green LED "Power Out".
 Dome lights "On" with door open, delayed "Off" at close, (Switch selectable).
 Laser custom cut faceplate switch panels available and shown separately.
 Clear plastic cover optional.

Bus Power Center System

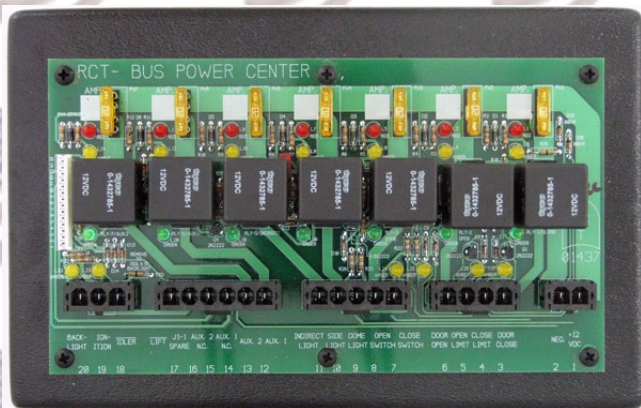

Control Size: Top To Bottom 6 1/2" Left to Right 10 1/2"

Additional Items Required:

Connector Kit: RCT-Molex-00007


Data Cable: DAT-01350-00070 (15 Conductor Cable 7' length)

Data Cable : DAT-01348-00010 (8 Conductor Cable 12")

Other standard lengths available



RCT-01026-00900 Black Matte/Reversible
Faceplate Shown: Top to Bottom 2 1/2" Left to Right 5 3/4"

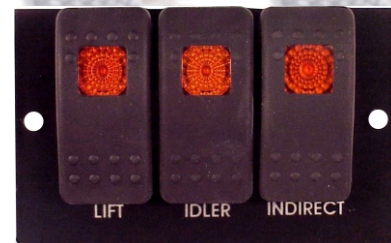

RCT-01027-00900 Black Matte/Reversible

Serving the Transportation Industry Since 1988

2573 E. Kercher Road Goshen, IN 46528 1-574-642-3857 Toll Free 1-886-457-7790

www.rctronics.com